


// POWERBLADE HP™ 2.25



| TEST | UNIT | SPECIFICATIONS |
|----------------------------|----------------------|----------------|
| Linear Density - Denier* | Denier | 10,800 |
| Thickness | Microns | 240 |
| Break Strength** | lbs/force | 20 |
| Elongation | % | > 30 |
| Total Lead Content | ppm | < 100 |
| Total Product Weight*** | oz / yd ² | 72 |
| Pile Yarn Fiber Weight**** | oz / yd ² | 44 |
| Primary Backing Weight**** | oz / yd ² | 8 |
| Secondary Backing Weight† | oz / yd ² | 20 |
| Average Pile Height**** | inches | 2.25 |
| Average Tuft Bind Strength | lb / force | > 10 |
| Tufting Gauge | inches | 1/2 |
| Average Grab Tear Strength | lb / force | > 200 |
| g-Max | | < 200 |
| Pill Flammability | | Pass |
| Infiltrometer (Drainage) | in / hr | > 25 |

Except where noted as a minimum or maximum, the above specifications are nominal.

* All values are ± 8% ** All values are ± 25% *** All values are ± 10% **** All values are ± 5% † All values are ± 3 oz

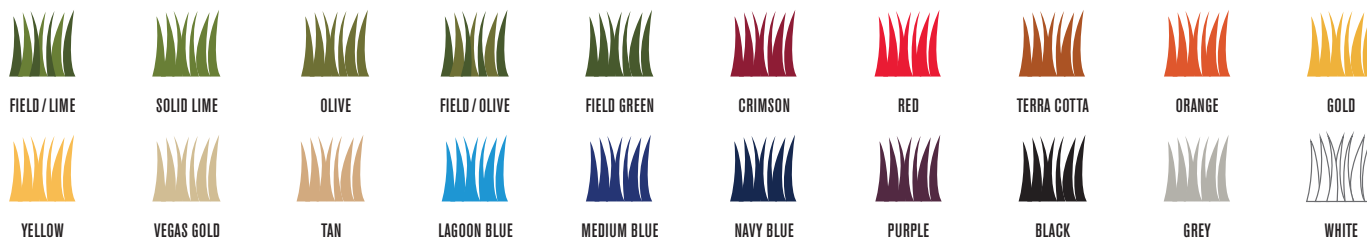

The colors shown are not intended for exact matching purposes, please refer to actual sample swatches for accurate hues.